

mato



Hose Reels, Open and Accessories

Description	Images and specifications can be subject to change without notice	Part No.
-------------	---	----------

Hose Reel, open

with swivel and hose stopper, max. 60 bar (870 psi)

Designed for wall, ceiling and floor mounting, suitable for engine, gearbox and hydraulic oils, as well as diesel, light fuel oil and Anti-Freeze

Connecting threads on model **DN 12 (1/2")**

Hose: 1/2" swivel nuts, swivel 1/2" male

Connecting threads on model **DN 16 (3/4")**

Hose: 3/4" swivel nuts, swivel 3/4" male

Hose reel, open, without hose for max. 15 m hose DN12 (1/2") **35 204 10**

Hose reel, open, without hose for max.12 m hose DN16 (3/4") **35 204 34**

Hose reel, open, with 10 m hose DN 12 (1/2") **35 210 04**

Hose reel, open, with 15 m hose DN 12 (1/2") **35 210 11**

Hose reel, open, with 8 m hose DN 16 (3/4") **35 210 35**

Hose reel, open, with 12 m hose DN 16 (3/4") **35 210 59**



Hose Reel with Stainless Steel Shaft, open

stainless steel swivel, max. 300 bar (4.350 psi)

Suitable for e.g. windshield cleaner, water, AdBlue® and neutral emulsions. Further liquids upon request.

EPDM-hose, conductive DN12 (1/2") max. 20 bar,

stainless steel (1.4305) swivel R1/2" outlet

Hose reel with stainless steel shaft, open, without hose **35 211 03**

Hose reel with stainless steel shaft, open, with 10 m hose DN 12 **35 211 27**

Hose reel with stainless steel shaft, open, with 15 m hose DN 12 **35 211 41**



Hose Reel for Grease, open, with Swivel

and hose stopper, max. 500 bar (7.350 psi)

Designed for wall, ceiling and floor mounting, suitable for use in high pressure applications

Hose: 1/4" outlet, swivel 1/4" female

Hose reel for grease, open, without hose **35 307 30**

Hose reel for grease, open, with 10 m hose DN 6 (1/4") **35 310 03**

Hose reel for grease, open, with 15 m hose DN 6 (1/4") **35 315 15**

Swivels

Brass swivel for oil, diesel, anti-freeze, etc., max. 60 bar
stainless steel swivel for e.g. windshield cleaner, water
AdBlue®, max. 300 bar

Galvanized steel swivel for grease, max. 500 bar

Swivel for hose reel DN 12 - 1/2" outlets **35 219 98**

Swivel for hose reel DN 16 - 1/2" - 3/4" outlets **35 220 01**

Swivel for hose reel with stainless steel shaft, 1/2" outlets **35 221 00**

Swivel for hose reel for grease, 1/2" - 1/4" outlet/inlet **35 319 97**

EPDM-hose, conductive

Connecting hose for hose reel, open with stainless steel shaft
incl. swivel nuts 1/2" in stainless steel, max. 20 bar

EPDM-hose, conductive 1 m **34 620 79**

Wall Bracket for open Hose Reels

This special mounting bracket enables the open hose reels to swivel.

The full range of swivel is 120 degrees.

Wall Bracket for open Hose Reels **35 321 23**



Hose Reels, Cased and Accessories

Description	Images and specifications can be subject to change without notice	Part No.
-------------	---	----------

Hose Reel, Cased

with hose stopper, max 60 bar (870 psi)

Designed for wall, ceiling and floor mounting suitable for engine, gearbox and hydraulic oils, as well as diesel, light fuel oil and Anti-Freeze

Robust Hose Reel with powder coated metal case. Cases can be configured with three different versions of hose outlet window. Rows of cased reels can be mounted side by side without space gaps.

External thread for Unit DN 12 - 1/2" outlet

External thread for Unit DN 16 - 3/4" outlet

Dimensions: height/width/depth 470 / 215 / 500 mm

Hose reel, cased, with 10 m hose DN 12 (1/2")	35 230 39
Hose Reel, cased, with 15 m hose DN 12 (1/2")	35 230 60
Hose reel, cased, with 8 m hose DN 16 (3/4")	35 232 06
Hose Reel, cased, with 12 m hose DN 16 (3/4")	35 232 37

Hose Reel, Cased, for Grease

with hose stopper, max. 500 bar

Designed for wall, ceiling and floor mounting suitable for use in high pressure applications. For details about different configurations see above.

External Thread 1/4" outlet

Hose reel, cased, for grease with 10 m hose DN 6 (1/4")	35 235 10
Hose reel, cased, for grease with 15 m hose DN 6 (1/4")	35 235 41

Wall Bracket for cased Hose Reels



This special mounting bracket enables the cased hose reels to swivel. The full range of swivel is 120 degrees

Wall Bracket for cased Hose Reels	35 321 85
-----------------------------------	------------------

Mounting Installation Kit for cased Hose Reels

Cased Hose Reels can be wal be ceiling mounted with these kits

Mounting Installation Kit for 2 cased Hose Reels	35 324 20
Mounting Installation Kit for 3 cased Hose Reels	35 324 37

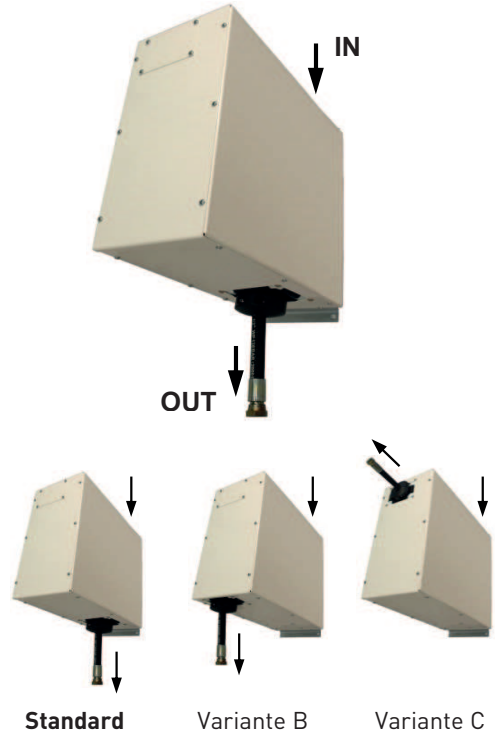

Hose Reel for Compressed Air, Aluminum Hose Retainer

Description

Images and specifications can be subject to change without notice

Part No.

Hose Reel for Compressed Air, Cased

Cased hose reel for air, with swivel bracket for wall mounting, portable/mobile, can be detached from bracket with carry handle
 hose length 11 m, 8x12, with hose stopper
 inlet hose 1,5 m, connecting thread 1/4"
 Maximum working pressure: 20 bar (290 psi)

Wall bracket for air hose reel

35 322 60




Cased hose reel for compressed air

34 024 02

Aluminum Hose Retainer

The hose retainers are perfectly suitable for hoses, cables and ropes.
 Variable screw-hole pattern (7 holes) allow for flexible wall mounting.
 The countersunk holes ensure a smooth and flat surface

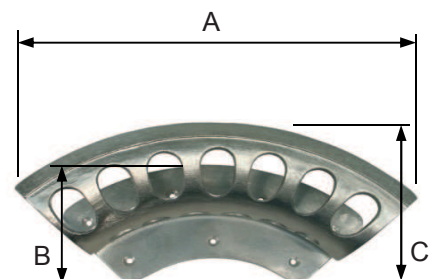

Dimensions:

Aluminum hose retainer small

A: 186 mm B: 75 mm C: 85 mm D: 57 mm

Aluminum hose retainer medium

A: 248 mm B: 96 mm C: 118 mm D: 97 mm

Aluminum hose retainer big

A: 336 mm B: 124 mm C: 152 mm D: 132 mm

Aluminum hose retainer oversize

A: 358 mm B: 124 mm C: 152 mm D: 132 mm

Aluminum hose retainer small

35 198 10

Aluminum hose retainer medium

35 198 27

Aluminum hose retainer big

35 198 34

Aluminum hose retainer oversize

35 198 41